ROBUST DETAIL E-FC-16

Approved Document E compliant

3mm ISORUBBER CC3 is made with recycled waste rubber

Qualifies for 3 CODE FOR SUSTAINABLE HOMES CREDITS

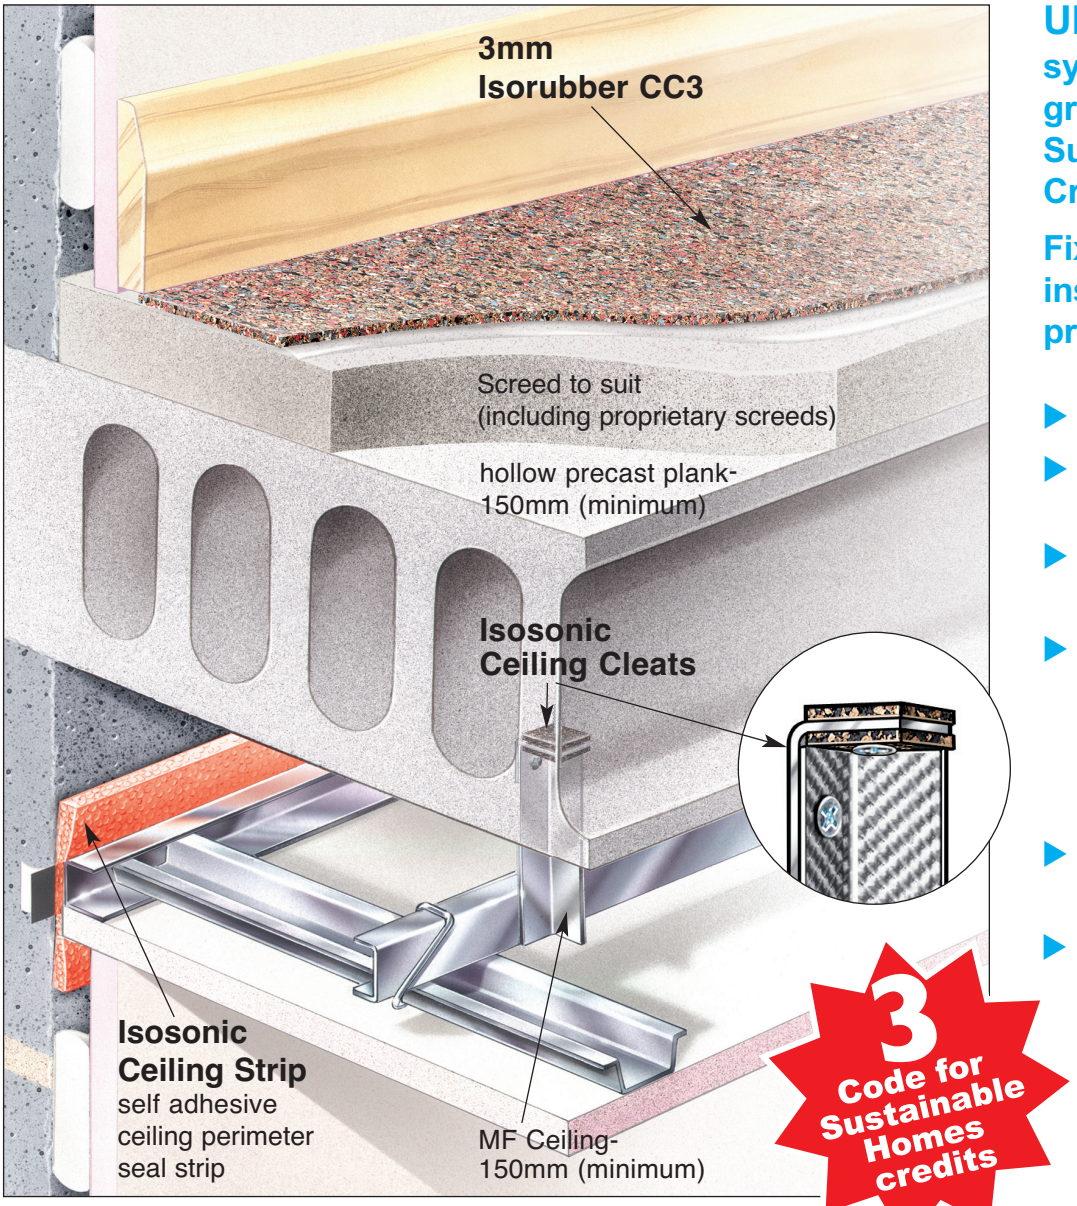

3 Code for Sustainable Homes credits awarded

Refer to the Robust Details Pattern Book for full specifications.

UNIQUE- Robust Detail system that automatically grants 3 Code for Sustainable Homes Credits

Fixed resilient layer sound insulation for screeded precast plank floors

- Easy to fit
- 3mm thick- saving on construction depth
- Minimum 150mm to full range of PC planks
- Compatible with the full range of:
  - •External wall block densities
  - •Full range of screeds
  - •Full range of pc planks
- Provides an attractive temporary floor finish
- Can be used as the underlay for Vinyl, ceramic and laminate floors.

SYSTEM COMPONENTS	
3mm Isorubber CC3	3mm thick resilient fixed surface layer
Isosonic Ceiling Strip	'easy fit' self adhesive flanking insulation strip
Isosonic Ceiling Cleat	sound energy absorbing ceiling fixing

FASTRACKCAD® ARCHITECTURAL CAD DATABASES

Made from recycled waste rubber

For advice on non Robust Detail applications contact the Thermal Economics Technical Department on: 01582 544255

For full Installation Manual visit www.thermal-economics.co.uk

Thermal Economics Ltd Thermal House 8 Cardiff Road Luton Bedfordshire LU1 1PP
Tel:01582 450814 Fax:01582 429305 E-mail:info@thermal-economics.co.uk Web:www.thermal-economics.co.uk

Thermal Economics THERMAL & SOUND INSULATION TECHNOLOGY

Please visit our website for the full range of Thermal and Sound Insulation products at www.thermal-economics.co.uk

©Thermal Economics Ltd. Draft 2 (for Iss 1) Feb 2013