

INSTALLATION GUIDE FOR















Isorubber Contract™

IMPORTANT!!!

This requires an exceptionally high acoustic insulation performance for which it is essential that all of the below guidance is adhered to and applied with the highest possible standard of workmanship.

Products required:
Isorubber FRB
Isobond Adhesive

Tools required:
1.5mm (A2) Triangular Notched Trowel
Roller
Sharp 'Stanley' Type Knife
Straight Edge

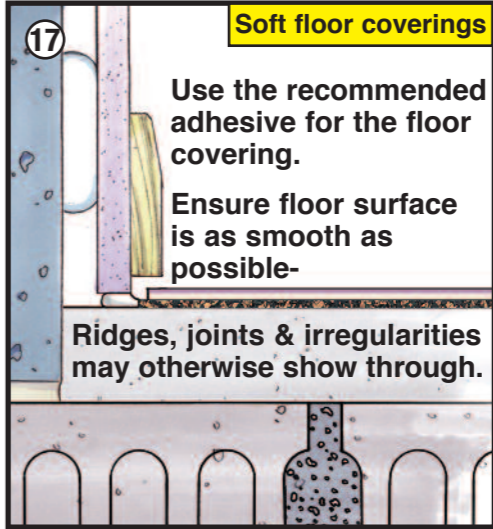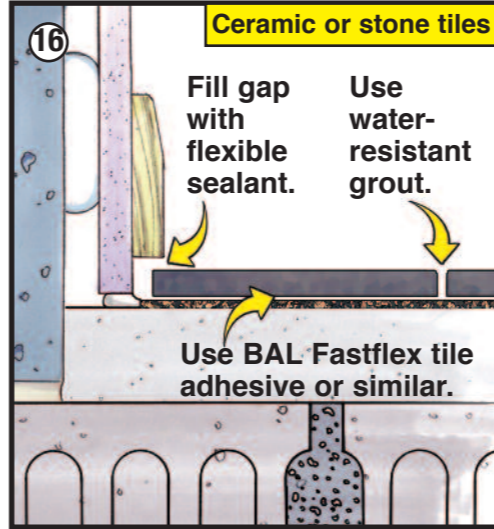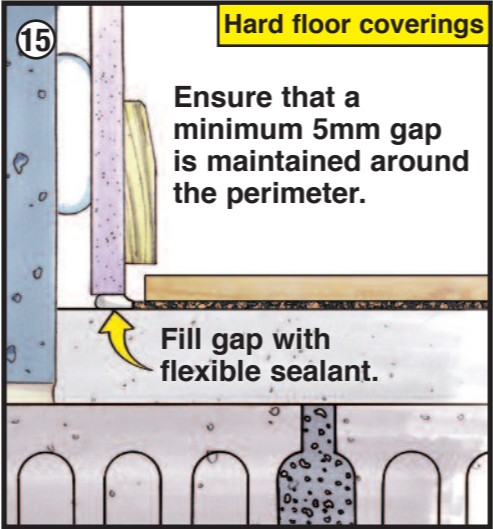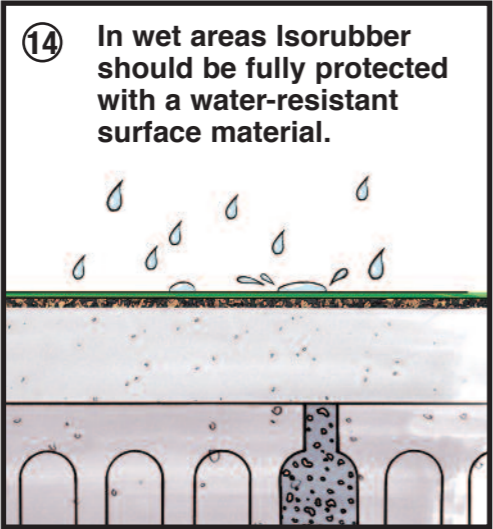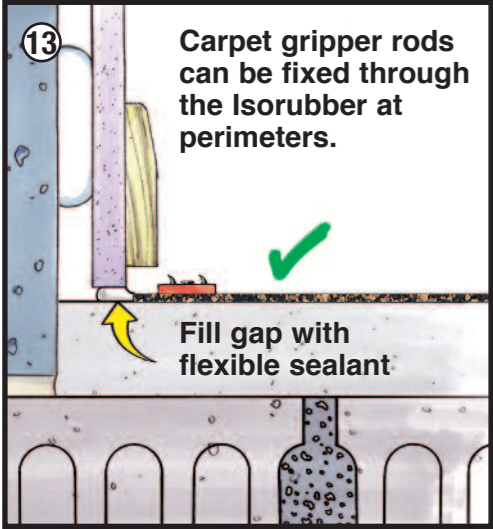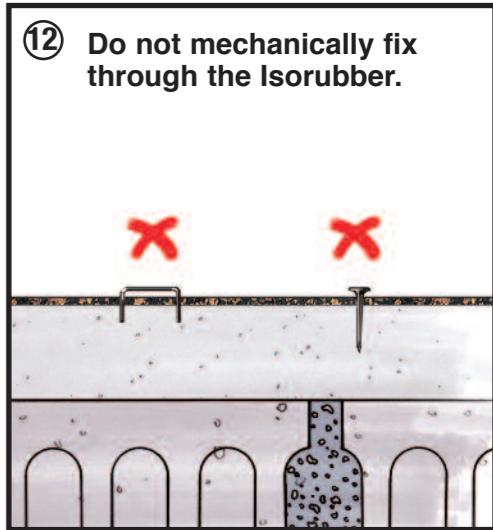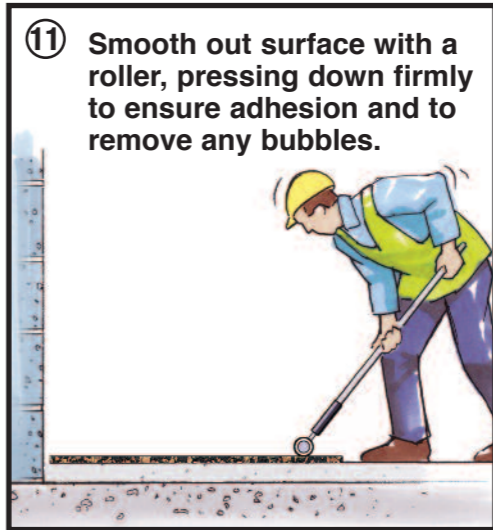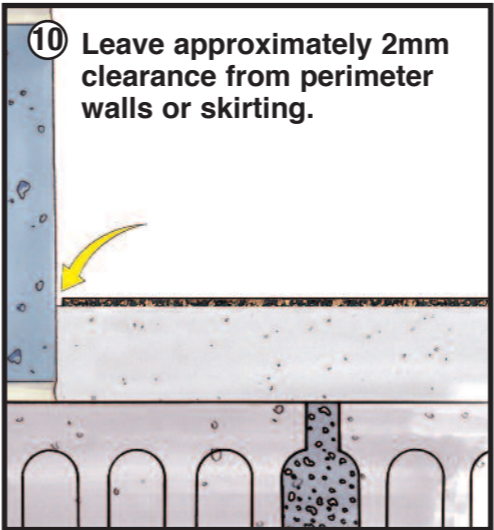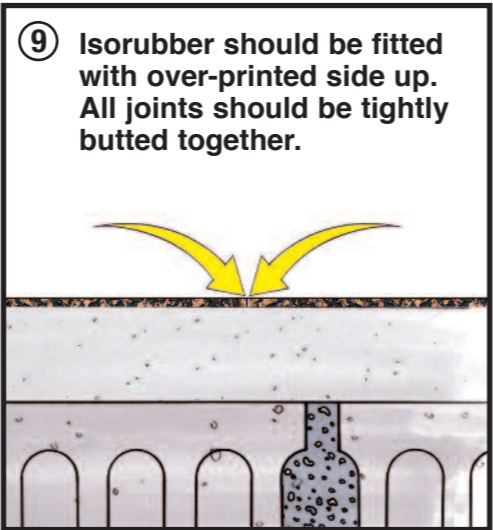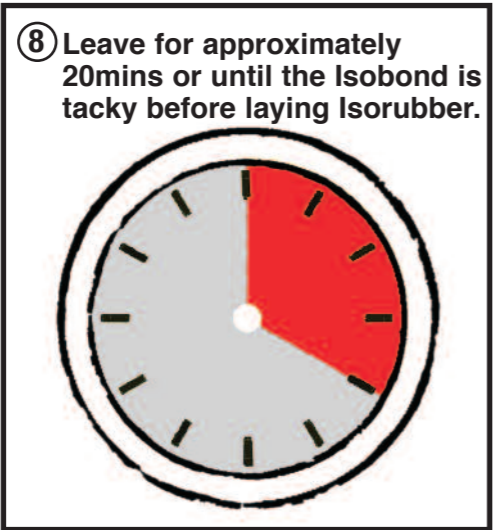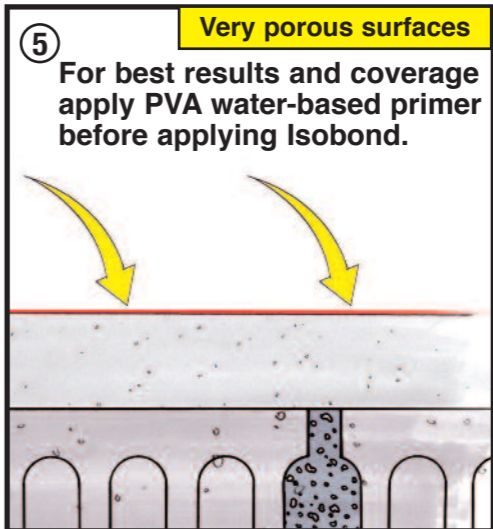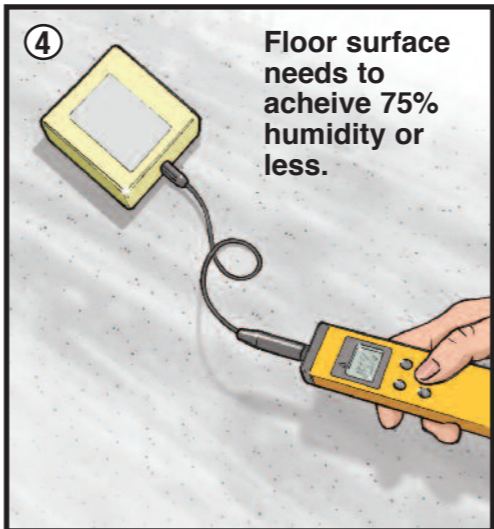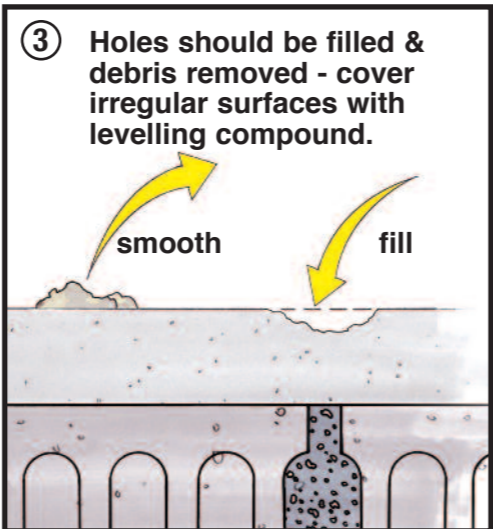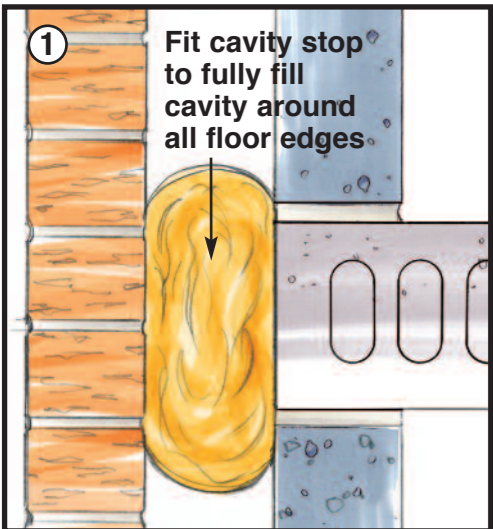

Made from recycled waste rubber

Product Data
Thickness : 3mm
Roll Size : 1m x 20m
Tog Rating: 0.4 (3mm thickness)

Please visit our website for the full range of Thermal and Acoustic Insulation products at www.thermal-economics.co.uk