

INSTALLATION GUIDE FOR ISORUBBER TOP & FR



**3 CODE FOR
SUSTAINABLE HOMES
CREDITS ACHIEVABLE
THROUGH TESTING**



**3 CODE FOR
SUSTAINABLE HOMES
CREDITS ACHIEVABLE
THROUGH TESTING**



**3 CODE FOR
SUSTAINABLE HOMES
CREDITS UPON
REGISTRATION**



**TESTED TO
ACHIEVE A
REACTION TO
FIRE RATING
OF C_{fl}**

IMPORTANT!!!















This requires an exceptionally high acoustic insulation performance for which it is essential that all of the below guidance is adhered to and applied with the highest possible standard of workmanship.

Products required:

Isorubber FRB
Isobond Adhesive
Isosonic Ceiling Strip
(where applicable)

Tools required:

1.5mm (A2) Triangular Notched Trowel
Roller
Sharp 'Stanley' Type Knife
Straight Edge

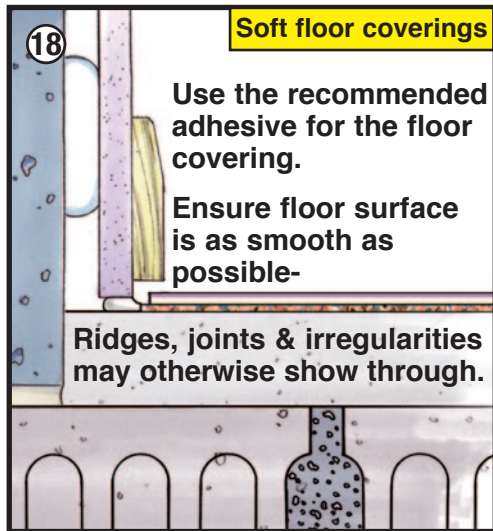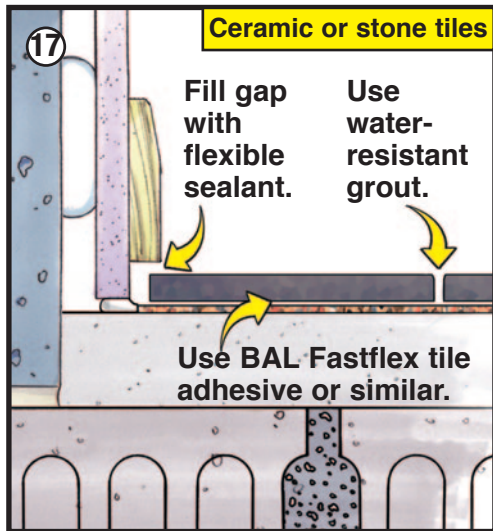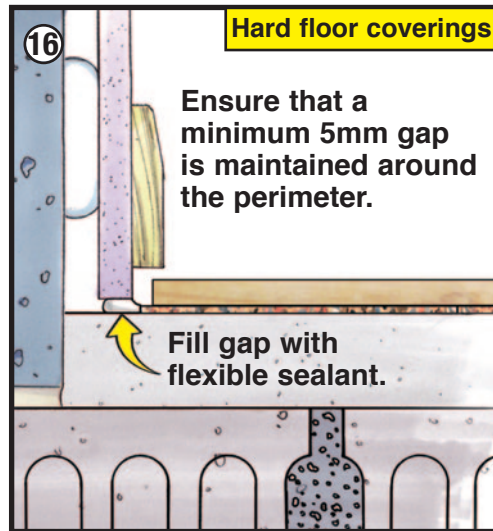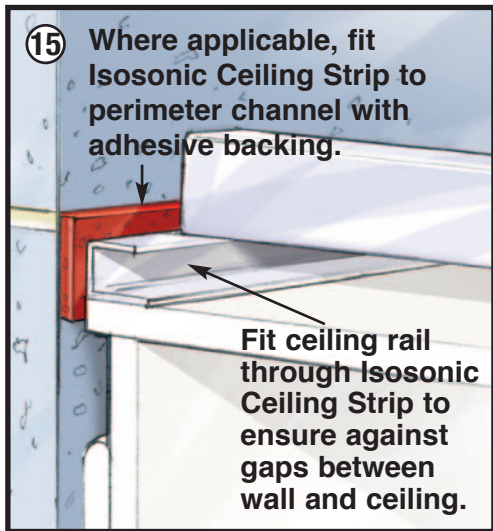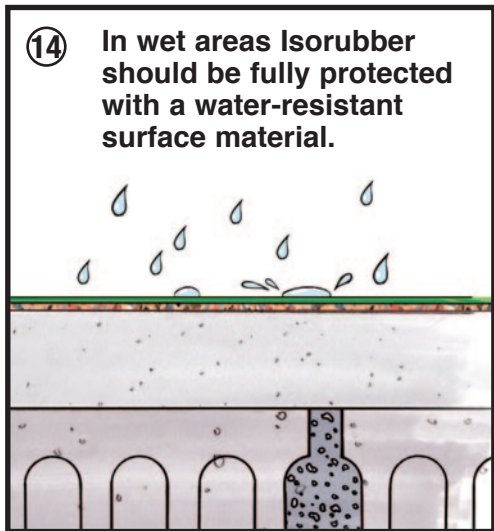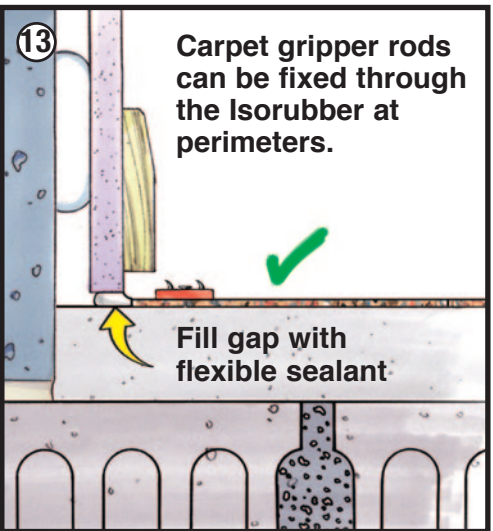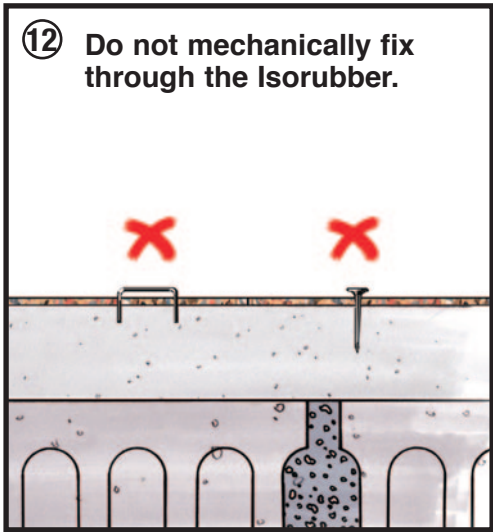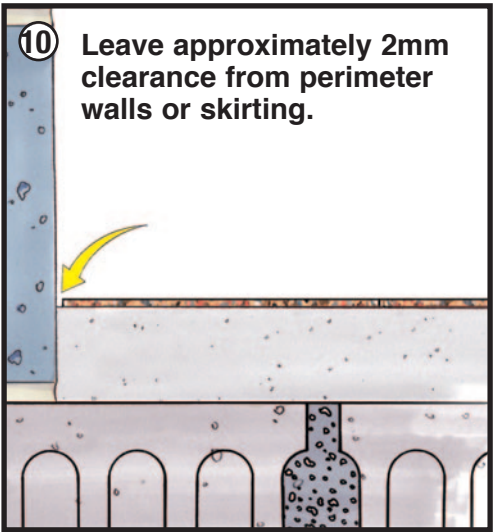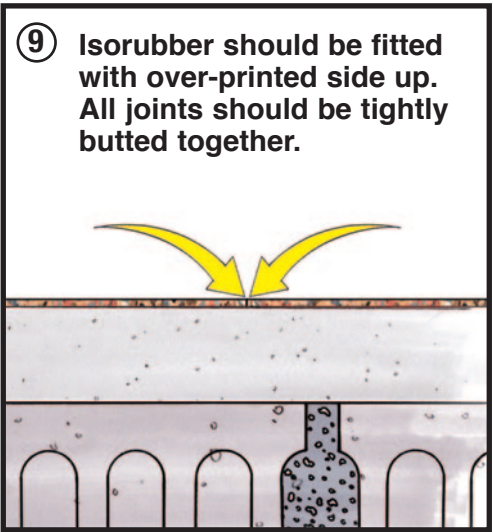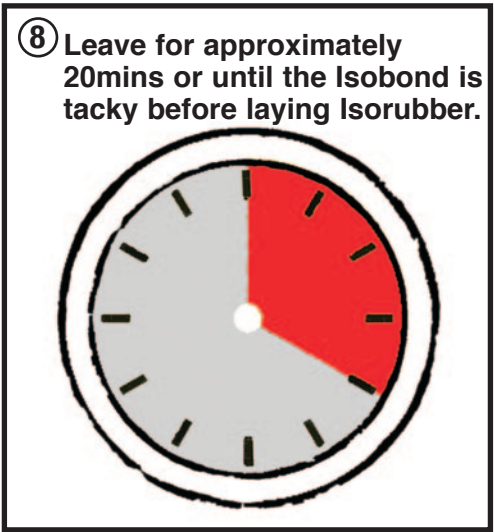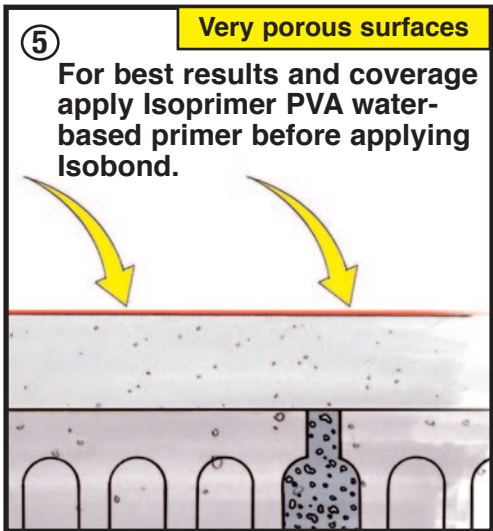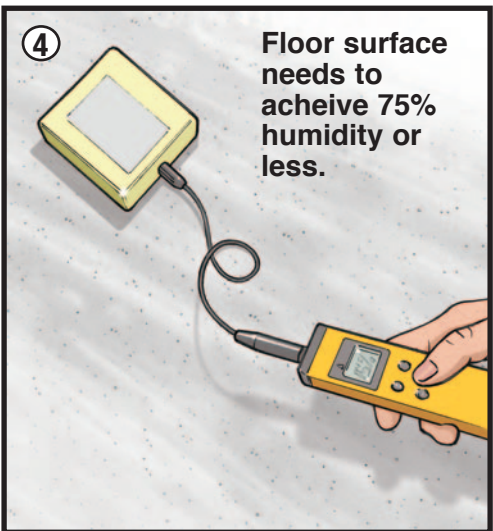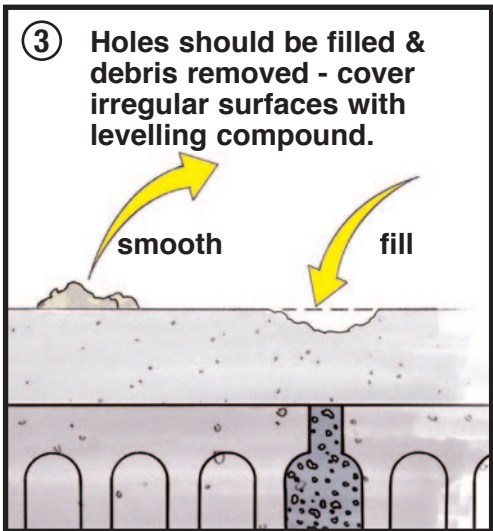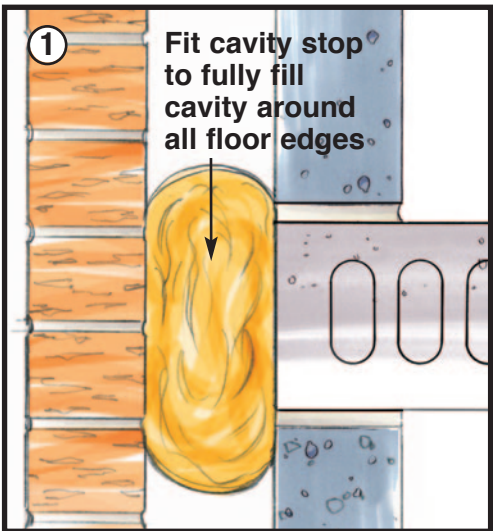

CONTACT OUR TECHNICAL DEPARTMENT ON 01582 544255 OR THERMAL-ECONOMICS.CO.UK

©Thermal Economics Ltd. Draft 1 (Issue 3) April 2021

